

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number  
**WO 01/17255 A1**

(51) International Patent Classification<sup>7</sup>: H04N 7/173, 7/14

(74) Agent: ROLNIK, Robert, C.; Nokia Inc., 6000 Connection Drive, 1-4-755, Irving, TX 75039 (US).

(21) International Application Number: PCT/IB00/01176

(22) International Filing Date: 25 August 2000 (25.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(30) Priority Data:  
09/384,882 27 August 1999 (27.08.1999) US

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(71) Applicant (*for LC only*): NOKIA INC. [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).


Published:

— With international search report.

(72) Inventors: AALTONEN, Janne; Sukkulakuja 2B47, FIN-20100 Turku (FI). IKONEN, Ari; Joukahaisenkatu 1, FIN-20520 Turku (FI). TALMOLA, Pekka; Varpusenkatu 2, FIN-20240 Turku (FI).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MOBILE MULTIMEDIA TERMINAL FOR DVB-T AND LARGE AND SMALL CELL COMMUNICATION

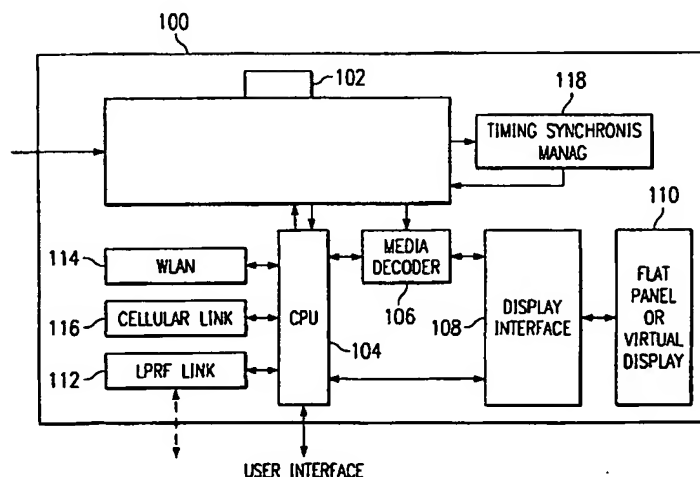

(57) Abstract: A method and apparatus for providing an interactive mobile multimedia terminal (100). The mobile multimedia terminal (or MMT) (100) allows for wideband data stream reception using a digital data broadcast receiver (102) such as DVB-T. Interactivity is realized with built-in local or large cell size communications link (116 and 112). The local link (112) could be WLAN or Bluetooth (a low-power RF transceiver). The large cell size communications link (116) could be a mobile station link e.g., GSM, CDMA, TDMA, etc. A mobile station with a Bluetooth link can be used as an IP router or a portable base station for large cell size communication if no local connection point is found. The MMT (100) integrates DVB-T reception, digital display, and communications links together to provide interactivity in a mobile environment. The MMT communications link with a mobile station enables it to act as an extended display for the mobile station.

MOBILE MULTIMEDIA TERMINAL FOR DVB-T  
AND  
LARGE AND SMALL CELL COMMUNICATION

5      FIELD OF THE INVENTION

This invention relates to multimedia terminals and, more particularly, to interactive multimedia terminals using DVB in a mobile environment.

BACKGROUND OF THE INVENTION

10      The explosion of wireless data communication has been fueled by advances in semiconductor technology and software. These advances have allowed audio and data signals to be transmitted over digital networks.

Digital and mixed signal systems offer many advantages over old-fashioned analog systems. One important advantage is the ability of digital systems to transmit and receive more information at higher rates. Whereas analog systems are limited to  
15      transmitting audio and video at a rate of 64 Kbps, digital systems can compress such transmissions to transmit eight times as much information at the same rate. Moreover, faster processors have allowed digital systems to transmit bits at ever increasing rates. By taking advantage of the compression routines and faster processors to transmit information more accurately and at higher rates, significant  
20      savings have been realized in both switching capacity and ongoing line costs.

Additional advantages have been realized through the use of multiple access techniques such as Time Division Multiple Access ("TDMA") and Code Division Multiple Access ("CDMA"). These techniques allow for multiple users to access a single bandwidth. They also allow for audio and data signals transmitted by a single  
25      user to be intermingled. These techniques make better use of scarce airwave space.

A recent development in the wireless information revolution has been the transmission of digital video signals over the airwaves, for example, using DVB-T. A similar development is occurring in the RF band, as efforts are being made to add video capability to cellular telephones, fax machines and computers. Before quality  
30      video capability can be added to these machines, however, a problem arising from bandwidth limitation must be overcome. Because these machines operate on frequencies between 900 and 1900 Mhz, the bandwidth is not wide enough to

transmit the enormous amount of video and audio information that is required for quality motion pictures.

Digital television provides more channels at a higher quality than is currently available with analog broadcasts. One analog channel provides the bandwidth capacity for one high-definition (HDTV) digital broadcast or several standard definition (SDTV) digital broadcasts. Digital television is scalable between these two extremes. Therefore, digital broadcasters can make a trade-off between vastly improved image and sound quality and an increased number of programming choices.

Digital television is deliverable to moving receivers. Currently, analog television reception is non-existent or severally limited in moving receivers. However, digital receivers allow for clear reception in cars, buses, trains, and in handheld television sets such as the Sony Watchman™.

Most of the equipment used to create, edit, and distribute television programs is now digital. The analog reception of a television signal, via cable, aerial, or satellite, is the end result of a long chain of events, most of which have taken place in the digital domain. For example, in delivering a new broadcast, the field reporter uses digital satellite news gathering equipment to uplink her report to a programming center. The material is digitally received, decoded, and compiled with live program feeds in a studio. The broadcast is then sent digitally around the world to professional receivers. Finally, the broadcast is converted to an analog signal and sent to the end viewer.

An intelligent TV can receive communication services by connecting a TV to a value added network (VAN). The intelligent TV includes an information signal processing unit for receiving information communication data (hereinafter, "information data") when the intelligent TV is connected to the VAN, and for generating information RGB signals, and switching control signals in order to display the information data on a screen. The intelligent TV selects and displays on the screen one of the information data signals processed in the information signal processing unit and a TV RGB signal processed in a TV signal processing unit, in accordance with the switching control signal output from the information signal processing unit. Intelligent TV makes it possible to view, through a TV screen, several communication services, such as stock quotes, news services, weather

reports, and TV program lists, being transmitted through the VANs. Therefore, it has an advantage that persons who are not familiar with the usage of a computer can easily receive communication services.

Even though intelligent TV has the advantage of receiving communication services through the TV screen, it cannot display multiple signals at the same time. Information signals for displaying information data on a screen, a TV signal, a Picture-In-Picture (PIP) signal for enabling two screens to be viewed simultaneously, and a TV on-screen-display (OSD) signal must be displayed one at a time. Therefore, signals are displayed according to a predetermined priority. For example, an information signal is displayed preferentially over a TV signal, a PIP signal is displayed preferentially over an information signal, and a TV OSD signal is displayed preferentially over a PIP signal.

Current information delivery services described above lack many features that would enhance their usability and desirability by the public. As mentioned, the intelligent TV lacks an ability to display multiple signals simultaneously. In addition, an online connection of two delivery services with one of the services being, for example, an interactive application, is not available. Current technologies are dependent on stationary receivers. Since multiple signals cannot be integrated by the integrated receiver/decoder (or IRD), information delivery is dependent on the location or site.

New display technologies provide the possibility to build low power and high quality portable display devices. These devices are based on large full color flat panel displays or on virtual (helmet mount) displays. The common denominator for these kinds of displays is that they are digital and matrix type displays. Introduction of DVB-T enables, for the first time in TV broadcast history, the possibility of truly mobile reception of TV. In addition to conventional TV services, DVB-T provides access to broadcast data services. Integration of DVB-T with digital display unit, such as the flat panel or helmet mount displays described above, makes it possible to build fully digital TV receiver with studio quality picture.

**Figure 3** depicts a block diagram of the current multimedia architecture. Currently, the digital set-top-box (STB) **302** and digital TV display **304** are separate. Furthermore, the STB 302 communication link is only of a single type. For example, the STB communications link is a hard interface such as coax-cable or POTS.

Therefore, the typical digital TV 304 connected to an STB 302 offers no portability or mobility.

Laptop and notebook computers are now equipped with the means to connect to networks using a mobile (or wireless) link. Such connections usually utilize a modem and digital wireless transceiver built on a single card, e.g., a PCMCIA card. However, digital TV receivers have not been integrated into such devices. One reason for this lack of versatility is that digital TV receivers have high power consumption rates (relative to other laptop or notebook functions). Thus, the battery power of a laptop would be consumed rapidly. In addition, laptops, like STBs, are typically limited in their ability to communicate externally. For example, a serial port, parallel port and possibly a modem can be used to distribute information from a laptop. However, such devices do not switch between these links seamlessly. Further, such devices do not have the ability to take stock of their environment and dynamically switch to the most appropriate communication link.

#### SUMMARY OF THE INVENTION

The disclosed embodiments provide a method and apparatus for providing an interactive mobile multimedia terminal. The mobile multimedia terminal (or MMT) allows for wideband data stream reception using a digital data broadcast receiver such as DVB-T. Interactivity is realized with built-in local or large cell size communications link. The local link could be WLAN or Bluetooth (a low-power RF transceiver). The large cell size communications link could be a mobile station link e.g., GSM, CDMA, TDMA, etc. A mobile station with a Bluetooth link can be used as an IP router or a portable base station for large cell size communication if no local connection point is found. The MMT integrates DVB-T reception, digital display, and communications links together to provide interactivity in a mobile environment. The MMT communications link with a mobile station enables it to act as an extended display for the mobile station. The MMT can also act as a graphical interface for SMS messaging via the mobile station or manipulating other applications on the mobile station.

The disclosed embodiments can provide several advantages. For example, the MMT is a single device that can be used in a portable or mobile environment. The MMT is configured with different wireless links, enabling it to adapt seamlessly and dynamically to its communications environment by switching between different

communications interfaces, protocols, or links. For another example, the MMT can be used to receive and display (or broadcast) different kind of data. Such data can include, for example, digital content e.g., MP3 files, e-books, or newspapers, e-commerce data, or broadcast TV. For another example, the timing and  
5 synchronization manager can be used to save power by controlling the digital receiver of the MMT.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed inventions will be described with reference to the accompanying drawings, which show important sample embodiments of the invention and which are incorporated in the specification hereof by reference,  
10 wherein:

**Figure 1** depicts the presently preferred embodiment of the mobile multimedia terminal;

**Figure 2** depicts the presently preferred embodiment of a MMT and its  
15 corresponding communications environment;

**Figure 3** depicts a block diagram of the current multimedia architecture; and

**Figure 4** depicts a block diagram of a mobile station **400** that can act as an IP router or portable base station to the MMT **100**.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred embodiment. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not  
20 necessarily delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

**Figure 1** depicts the presently preferred embodiment of the mobile multimedia terminal (or MMT). The MMT provides an interactive, mobile environment. In the presently preferred embodiment, a DVB-T receiver **102** is  
30 controlled by a CPU **104**. The DVB-T receiver **102** is capable of receiving digital TV broadcasts according to the DVB-T standard. DVB-S (satellite) and DVB-C (cable) broadcasts are also standardized and may be used. The DVB-T standard specifies a broadband channel, preferably in the VHF frequency range, that carries a digital

data stream. In addition to TV broadcasts, channels in the DVB-T spectrum can be used to transmit data intended for receipt by specific users. Such data is generally encrypted for privacy. In this manner, DVB-T (or DVB-S or DVB-C) can be used for data transmission which requires a wideband downstream channel (from the source to the requestor). In the presently preferred embodiment, the MMT 100 is the requestor.

A media decoder 106 is controlled by the CPU 104 and used to decode the received DVB-T broadcast. The DVB-T broadcast standard uses MPEG-2 encoding. Therefore, in the presently preferred embodiment, the media decoder 106 is an MPEG-2 decoder. However, other forms of streaming video can and do use alternate protocols to transmit digital data. The media decoder 106 selected should be designed to match and decode the transmission protocol used by the digital data source.

A display interface 108 receives the decoded broadcast from the media decoder 106. The display interface 108 is designed to optimize the display of data to a user of the MMT 100. For example, the digital data received can be in the form of full motion video or it can be a graphic of some kind. The differing formats require differing modes to be optimally displayed. The display interface 108 acts as a video integrator. For example, the display interface can place a graphics overlay onto full motion video, manipulate the display of full motion video into a certain part of a display, or crop some video or graphics to show only their essential or moving parts on a display. The output of the display interface 108 drives a display 110 for the MMT 100.

In addition to processing a digital broadcast signal, the MMT 100 of the presently preferred embodiment is capable of transmitting information. Such information can include requests for information, data to be downloaded via digital broadcast, phone identification data, or regular voice and data communications over a mobile station (such as a mobile phone). In the presently preferred embodiment, the MMT 100 is equipped with a low-power radio frequency (LPRF) e.g., Bluetooth, transceiver 112. A transceiver configured according to the Bluetooth standard is capable of short range (approximately 10 meters) radio communication to a local transceiver. The local transceiver can be connected to a LAN, PSTN, or a low or high power wireless network. In addition to a LPRF link, the MMT 100 of the

presently preferred embodiment can be configured with a Wireless-LAN 114 or cellular transceiver 116. The cellular transceiver can be, for example, a GSM, TDMA, CDMA, AMPS, or other standard or proprietary communications protocol. The CPU controller 104 of the MMT 100 is configured to select the mode of communication between transceivers 112, 114, and 116 dynamically. The CPU 104 can select the appropriate communications link according to the current communications environment. For example, if a Bluetooth transceiver is detected, data can be exchanged using the Bluetooth transceiver 112 without the need for acquiring a channel on a cellular link. However, if voice data is to be transmitted, a cellular link would be desirable. Thus the CPU 104 would select the cellular transceiver 106 for transmission duties.

The LPRF link 112 of the MMT 100 can be used in conjunction with an external mobile station. The external mobile station can act as a portable (close range) base station. The external mobile station can also act as an IP router for web browsing and other network activities.

The DVB-T receiver 102 of the MMT 100 is activated or deactivated by the CPU 104. The DVB-T receiver 102 can be activated at user request. That is, when the user wishes to receive broadcast data or is expecting to receive broadcast data. The CPU 104 can also monitor the environment for service information and activate the DVB-T receiver 102 if conditions warrant it. For example, if services the user wishes to receive are detected, the CPU 104 can activate the DVB-T receiver 102. As another example, the CPU 104 can activate the DVB-T receiver 102 if and when it needs to, in order to impart important or timely data to the user, e.g., weather or news data.

In the presently preferred embodiment, the DVB-T receiver 102 is equipped with a timing element 118 enabling it to remain synchronous with the digital broadcast facility. This timer 118 makes it possible to switch on the receiver and pick up the selected data packets days after the last system synchronization. The timer 118 allows the CPU 104 to control activation of the DVB-T receiver 102 also enables power savings. For example, if video functionality is not currently in use, that is, digital broadcasts are not being or do not need to be received, the DVB-T receiver 102 is switched off by the CPU 104. Such a situation can occur when, for example, the MMT is web browsing over a communications link 112, 114, or 116.



**Figure 2** depicts the presently preferred embodiment of a MMT 100 and its corresponding communications environment **200**. Media is provided by a service provider **202**. Media can include, for example, data services, decryption keys for smart cards, digital TV, digital audio, or other digital data. The media can be provided on the request by user or under a "broadcast" principle. In the presently preferred embodiment specific requests for data are handled via a mobile station **204** equipped with an LPRF transceiver. The requests are transmitted via an LPRF link from the MMT 100 to the mobile station **204**. The mobile station **204** relays the request via a wireless operator **206**. The service provider **202** capable of providing the requested data receives the request from the wireless operator **206**. The media content is routed from the service provider **202**, via DVB-scrambling **210**, to a DVB Network operator **212**. The DVB Network operator **212** multiplexes the media content with free to air TV Services **214** and transports the data over a DVB broadcast channel **208**.

At the MMT 100, the DVB-T transmission is received by the DVB-T receiver **102**. A front end receiver **216** in the DVB-T receiver **102** receives the transmission, acting as the over-the-air interface of the receiver **102**. Data is transmitted to a descrambler **218** with a smart card **220**. The descrambler **218** is optional in the presently preferred embodiment. The decrypted/descrambled data is then forwarded to a demultiplexer **222**.

The front end **216**, descrambler **218**, smart card **220**, and demultiplexer **222** consume a majority of the power used by the DVB receiver **102**. Data for the demultiplexer **222** is routed to the media decoder **106**. Alternatively, the data can be routed to buffer or storage memory **224** or an optional memory card **226**. Storing the data instead of decoding and displaying it is dependent on the set up and usage of the DVB-T receiver **102**. For example, by storing data into memory, it is possible to display one data stream while receiving another. In the presently preferred embodiment, the timing and synchronization manager **118** controls the front end **216**, descrambler **218**, smart card **220**, and demultiplexer **222**. The timing and synchronization manager **118** activates these receiver components only when needed or upon user request. The CPU **104** of the MMT 100 controls all of the components of the MMT. The CPU **104** is responsible for reading the service

information and determining the communication environment of the MMT 100. The CPU 104 is used to configure the timing and synchronization manager 118.

Content to be shown on the display 110 of the MMT 100 can originate either from CPU 104 via memory 224 or 226 or from media decoder 106. The display of the MMT 100 can be, for example, a flat panel TFT display or a virtual display such as a head mounted LCOS 3D display. Display data is processed by the display interface 108 of the MMT. This interface 108 performs the needed operations of scaling, zooming, frame rate conversions, filtering, in order to appropriately display the data on the display 110 of the MMT 100. The display interface 108 can be configured to optimally display data depending on its type and the type of display 110 to be utilized.

Digital content can also include audio signals. Such content can be presented through the audio output 230 of the MMT 100. The audio output 230 of the MMT can be, e.g., speakers.

The MMT 100 can be configured to communicate in a variety of ways. For example, an LPRF link 112 can be used to communicate with a mobile station acting as a portable base station or IP router. For another example, in a home gateway environment, the MMT 100 can act as a node in a Wireless LAN using a WLAN transceiver 114.

**Figure 4** depicts a block diagram of a mobile station 400 that can act as an IP router or portable base station to the MMT 100. The mobile station 400 includes, in this example:

A control head 402 containing an audio interface, i.e. a speaker 404 and microphone 406. The control head 402 generally includes a display assembly 408 allowing a user to see dialed digits, stored information, messages, calling status information, including signal strength, etc. The control head generally includes a keypad 410, or other user control device, allowing a user to dial numbers, answer incoming calls, enter stored information, and perform other mobile station functions. The control head also has a controller unit 434 that interfaces with a logic control assembly 418 responsible, from the control unit perspective, for receiving commands from the keypad 410 or other control devices, and providing status information, alerts, and other information to the display assembly 408;

A transceiver unit **412** containing a transmitter unit **414**, a receiver unit **416**, and the logic control assembly **418**. The transmitter unit **414** converts low-level audio signals from the microphone **406** to digital coding using a codec (a data coder/decoder) **420**. The digitally encoded audio is represented by modulated shifts, for example, in the frequency domain, using a shift key modulator/demodulator **422**. Other codes transmission utilized by the logic control assembly **418**, such as station parameters and control information, may also be encoded for transmission. The modulated signal is then amplified **424** and transmitted via an antenna assembly **426**;

The antenna assembly **426** contains a TR (transmitter/receiver) switch **436** to prevent simultaneous reception and transmission of a signal by the mobile station **400**. The transceiver unit **412** is connected to the antenna assembly **426** through the TR switch **436**. The antenna assembly contains at least one antenna **438**;

The receiver unit **416** receives a transmitted signal via the antenna assembly **426**. The signal is amplified **424** and demodulated **422**. If the signal is an audio signal, it is decoded using the codec **420**. The audio signal is then reproduced by the speaker **404**. Other signals are handled by the logic control assembly **418** after demodulation **422**; and

A logic control assembly **418** usually containing an application specific integrated circuit (or ASIC) combining many functions, such as a general purpose microprocessor, digital signal processor, and other functions, into one integrated circuit. The logic control assembly **418** coordinates the overall operation of the transmitter and receiver using control messages. The various disclosed embodiments make use of the logic control assembly to control scanning and evaluation of other base stations. Generally, the logic control assembly operates from a program that is stored in flash memory **428** of the mobile station. Flash memory **428** allows upgrading of operating software, software correction or addition of new features. Flash memory **428** is also used to hold user information such as speed dialing names and stored numbers.

In addition to flash memory **428**, the mobile station will typically contain read only memory (ROM) **430** for storing information that should not change, such as startup procedures, and random access memory (RAM) **432** to hold temporary information such as channel number and system identifier.

In the presently preferred embodiment, the mobile station also includes an LPRF transceiver 112, e.g., Bluetooth, for communication with the MMT 100.

#### MODIFICATIONS AND VARIATIONS

As will be recognized by those skilled in the art, the innovative concepts described in the present application can be modified and varied over a tremendous range of applications, and accordingly the scope of patented subject matter is not limited by any of the specific exemplary teachings given.

For example, the digital receiver is described as a DVB-T receiver. However, the digital data received could be in any of a variety of digital formats, frequencies, protocols, etc. The digital receiver used should be configured to receive the types of data expected. Moreover, the digital receiver could be configured to receive digital information in a variety of formats or receive analog e.g., NTSC or PAL, and digital broadcasts.

For another example, the presently preferred embodiment is described as having only one digital receiver. However, differing embodiments of the MMT may be configured with multiple digital receivers. The use of more than one digital receiver can serve to increase the robustness of the data received in digital broadcast.

For another example, the presently preferred embodiment is described as operating over differing communications links, one at a time. However, it is possible that several of the communications links, e.g., LPRF, WLAN, and/or a wireless mobile station link can be operated at once to send and receive information to multiple places simultaneously.

For another example, while not stated explicitly in the presently preferred embodiment, it is possible to integrate a mobile station into the MMT. An integrated MMT/mobile station would allow the MMT to function as its own IP router or portable base station.

For another example, digital broadcast of data is anticipated in the presently preferred embodiment. However, it is possible that third generation (3G) or greater cellular networks will have the capacity to deliver TV reception and broadband data transmission. The MMT can be equipped with a different or alternate receiver which is configured to receive such digital data.

## CLAIMS

What is claimed is:

- 5       1. A method of mobile multimedia terminal interactivity, comprising the steps of:  
6             requesting information from a digital service provider;  
7             receiving a data signal from said digital service provider over the air;  
8             decoding said data signal for presentation;  
9             optimizing said data signal for output; and  
10            presenting said optimized signal as output.
- 11       2. The method of Claim 1, wherein said requesting step uses one of a plurality of  
12             wireless communications links.
- 13       3. The method of Claim 1, wherein said requesting step uses one of a plurality of  
14             wireless communications links and a controller determines the  
15             appropriate communications link.
- 16       4. The method of Claim 1, further comprising the step of storing said data signal.
- 17       5. The method of Claim 1, wherein said optimizing step further comprises the step  
18             of manipulating the data signal for display.
- 19       6. The method of Claim 1, wherein said optimizing step further comprises the step  
20             of combining said data signal with other data to create a display.
- 21       7. The method of Claim 1, wherein said data signal is received from a digital  
22             broadcast channel.
- 23       8. The method of Claim 1, wherein said data signal is display data for a mobile  
24             station.
- 25       9. The method of Claim 1, wherein said data signal is in DVB-T format.

- 1      10.The method of Claim 1, wherein said data signal is in MP3 format.
- 2      11.The method of Claim 1, wherein said presenting step uses a video display.
- 3      12.The method of Claim 1, wherein said presenting step uses an audio output.
- 4      13.    A mobile multimedia terminal, comprising:  
5          At least one receiver connected to receive over the air data signals;  
6          a controller connected to said receiver to manage and coordinate the  
7                  functions of said receiver;  
8          a display interface connected to said media decoder to optimize said received  
9                  over the air data signals for display; and  
10          a low power radio frequency transceiver connected to said controller to  
11                  provide an interactive environment with respect to said received  
12                  over the air data signals.
- 13      14.The mobile multimedia terminal of Claim 13, further comprising a media decoder  
14          connected to said receiver and said controller to decode said received  
15          over the air data signals.
- 16      15.The mobile multimedia terminal of Claim 13, wherein said controller switches the  
17          operation of said receiver on and off according to the communications  
18          environment.
- 19      16.The mobile multimedia terminal of Claim 13, further comprising a timing and  
20          synchronization connected to said controller and said receiver.
- 21      17.The mobile multimedia terminal of Claim 13, further comprising a timing and  
22          synchronization connected to said controller and said receiver wherein  
23          said timing and synchronization manager enables reception of said  
24          over the air data signals without resynchronizing said receiver.

- 1 18.The mobile multimedia terminal of Claim 13, further comprising a display  
2 connected to said display interface to display video data.
- 3 19.The mobile multimedia terminal of Claim 13, further comprising an audio output  
4 to present audio data.
- 5 20.The mobile multimedia terminal of Claim 13, further comprising memory  
6 connected to said controller to store said received over the air data  
7 signals.
- 8 21.The mobile multimedia terminal of Claim 13, wherein said over the air data signal  
9 is display data for a mobile station.
- 10 22.The mobile multimedia terminal of Claim 13, further comprising a wireless local  
11 area network transceiver connected to said controller to provide  
12 interactivity with said received over the air data signals.
- 13 23.The mobile multimedia terminal of Claim 13, further comprising a mobile station  
14 transceiver connected to said controller to provide interactivity with said  
15 received over the air data signals.
- 16 24.The mobile multimedia terminal of Claim 13, further comprising a mobile station  
17 transceiver connected to said controller to provide interactivity with said  
18 received over the air data signals.
- 19 25.The mobile multimedia terminal of Claim 13, further comprising a mobile station  
20 transceiver and a wireless local area network transceiver connected to  
21 said controller wherein said controller selects one of said transceivers  
22 to provide interactivity with said received over the air data signals  
23 according to the communications environment.
- 24 26.The mobile multimedia terminal of Claim 13, wherein at least one of said  
25 receivers is a DVB-T receiver.

- 1     27. An interactive mobile multimedia terminal system, comprising:  
2         a mobile station which communicates data requests;  
3         a service provider which receives said data requests and provides data  
4             according to said requests;  
5         a broadcast operator which receives said data from said service provider and  
6             transmits said data over a broadcast channel; and  
7         a mobile multimedia terminal which includes,  
8             at least one receiver which receives said data;  
9             a media decoder connected to said receiver to decode said received  
10                 data;  
11             a controller connected to said receiver and said media decoder to  
12                 manage and coordinated the functions of said receiver  
13                 and said media decoder;  
14             a display interface connected to said media decoder to optimize said  
15                 received data for display; and  
16             a low power radio frequency transceiver connected to said controller to  
17                 provide interactivity with said received data and a  
18                 communications link to said mobile station.
- 19     28.The interactive mobile multimedia terminal system of Claim 27, wherein said  
20         controller switches the operation of said receiver on and off according  
21         to the communications environment.
- 22     29.The interactive mobile multimedia terminal system of Claim 27, further  
23         comprising a timing and synchronization connected to said controller  
24         and said receiver.
- 25     30.The interactive mobile multimedia terminal system of Claim 27, further  
26         comprising a timing and synchronization connected to said controller  
27         and said receiver wherein said timing and synchronization manager  
28         enables reception of said over the air data signals without  
29         resynchronizing said receiver.



1 31.The interactive mobile multimedia terminal system of Claim 27, further  
2 comprising a mobile station transceiver and a wireless local area  
3 network transceiver connected to said controller wherein said controller  
4 selects one of said transceivers to provide interactivity with said  
5 received over the air data signals according to the communications  
6 environment.

7 32.The interactive mobile multimedia terminal system of Claim 27, wherein at least  
8 one of said receivers is a DVB-T receiver.

9 33.The interactive mobile multimedia terminal system of Claim 27, wherein said over  
10 the air data signal is display data for said mobile station.

11 34.The interactive mobile multimedia terminal system of Claim 27, further  
12 comprising a media decoder connected to said receiver and said  
13 controller to decode said received over the air data signals.

14 35.The interactive mobile multimedia terminal system of Claim 27, further  
15 comprising a display connected to said display interface to display  
16 video data;.

17 36.The interactive mobile multimedia terminal system of Claim 27, further a media  
18 decoder connected to said receiver and said controller to decode said  
19 received over the air data signals.

20 37.The interactive mobile multimedia terminal system of Claim 27, further  
21 comprising audio output to present audio data.

22 38.The interactive mobile multimedia terminal system of Claim 27, further  
23 comprising memory connected to said controller to store said received  
24 over the air data signals.

1 39.The interactive mobile multimedia terminal system of Claim 27, further  
2 comprising a wireless local area network transceiver connected to said  
3 controller to provide interactivity with said received over the air data  
4 signals.

5 40.The interactive mobile multimedia terminal system of Claim 27, further  
6 comprising a mobile station transceiver connected to said controller to  
7 provide interactivity with said received over the air data signals.

8 41.The interactive mobile multimedia terminal system of Claim 27, wherein said  
9 mobile station includes a low-power radio frequency transceiver for  
10 receiving data from said mobile multimedia terminal.

11 42.The interactive mobile multimedia terminal system of Claim 27, wherein said  
12 mobile multimedia terminal transmits data requests to said mobile  
13 station.

14 43.The interactive mobile multimedia terminal system of Claim 27, wherein said  
15 mobile multimedia terminal transmits data requests to said mobile  
16 station using said low-power radio frequency transceiver.

17 44.The interactive mobile multimedia terminal system of Claim 27, wherein said  
18 mobile station is integrated into said mobile multimedia terminal.

1/3

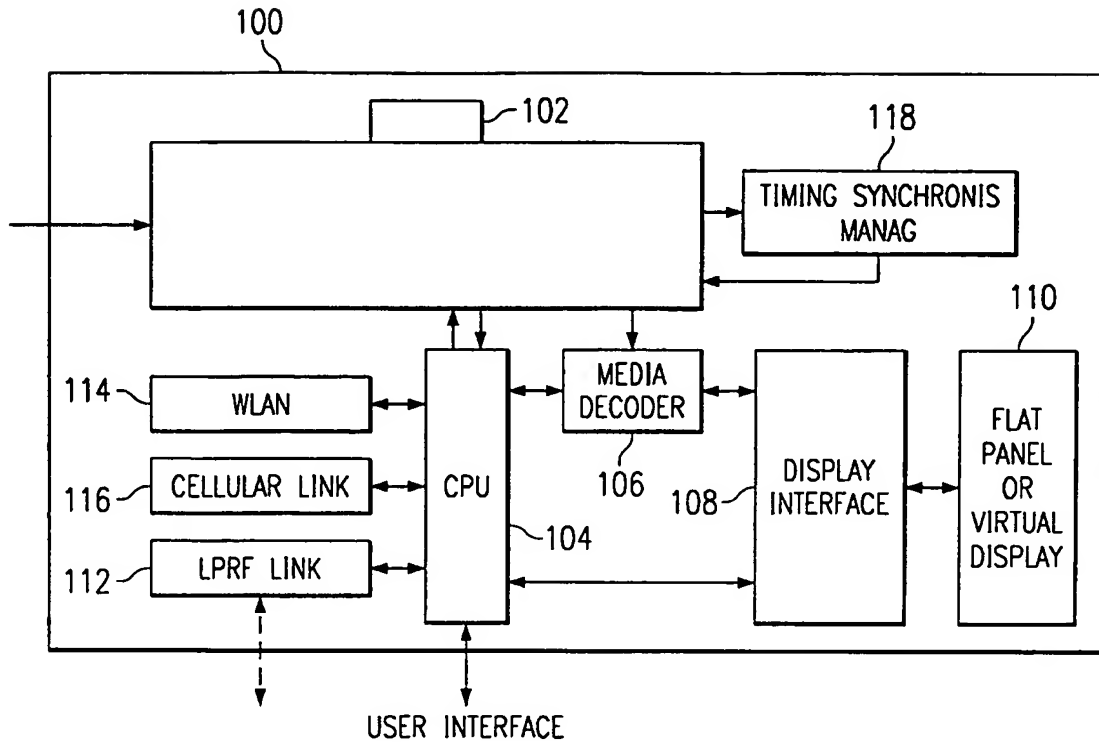


FIG. 1

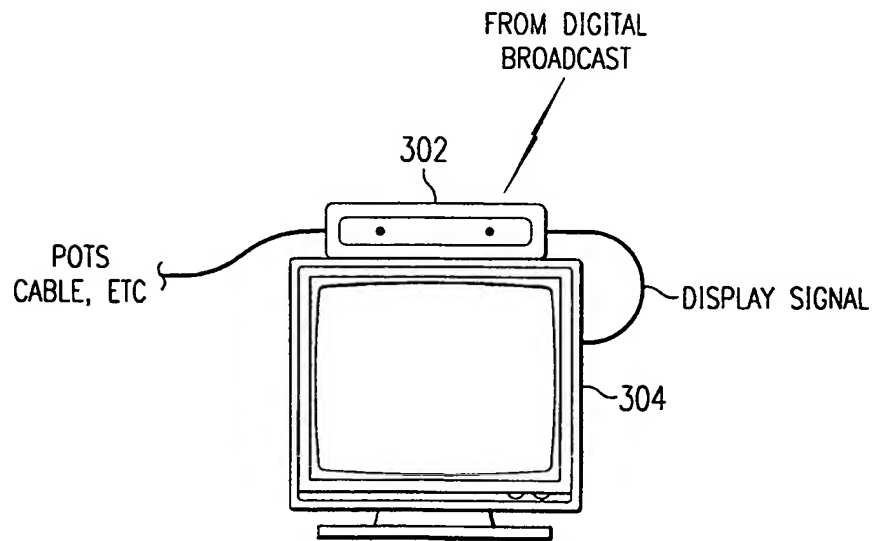
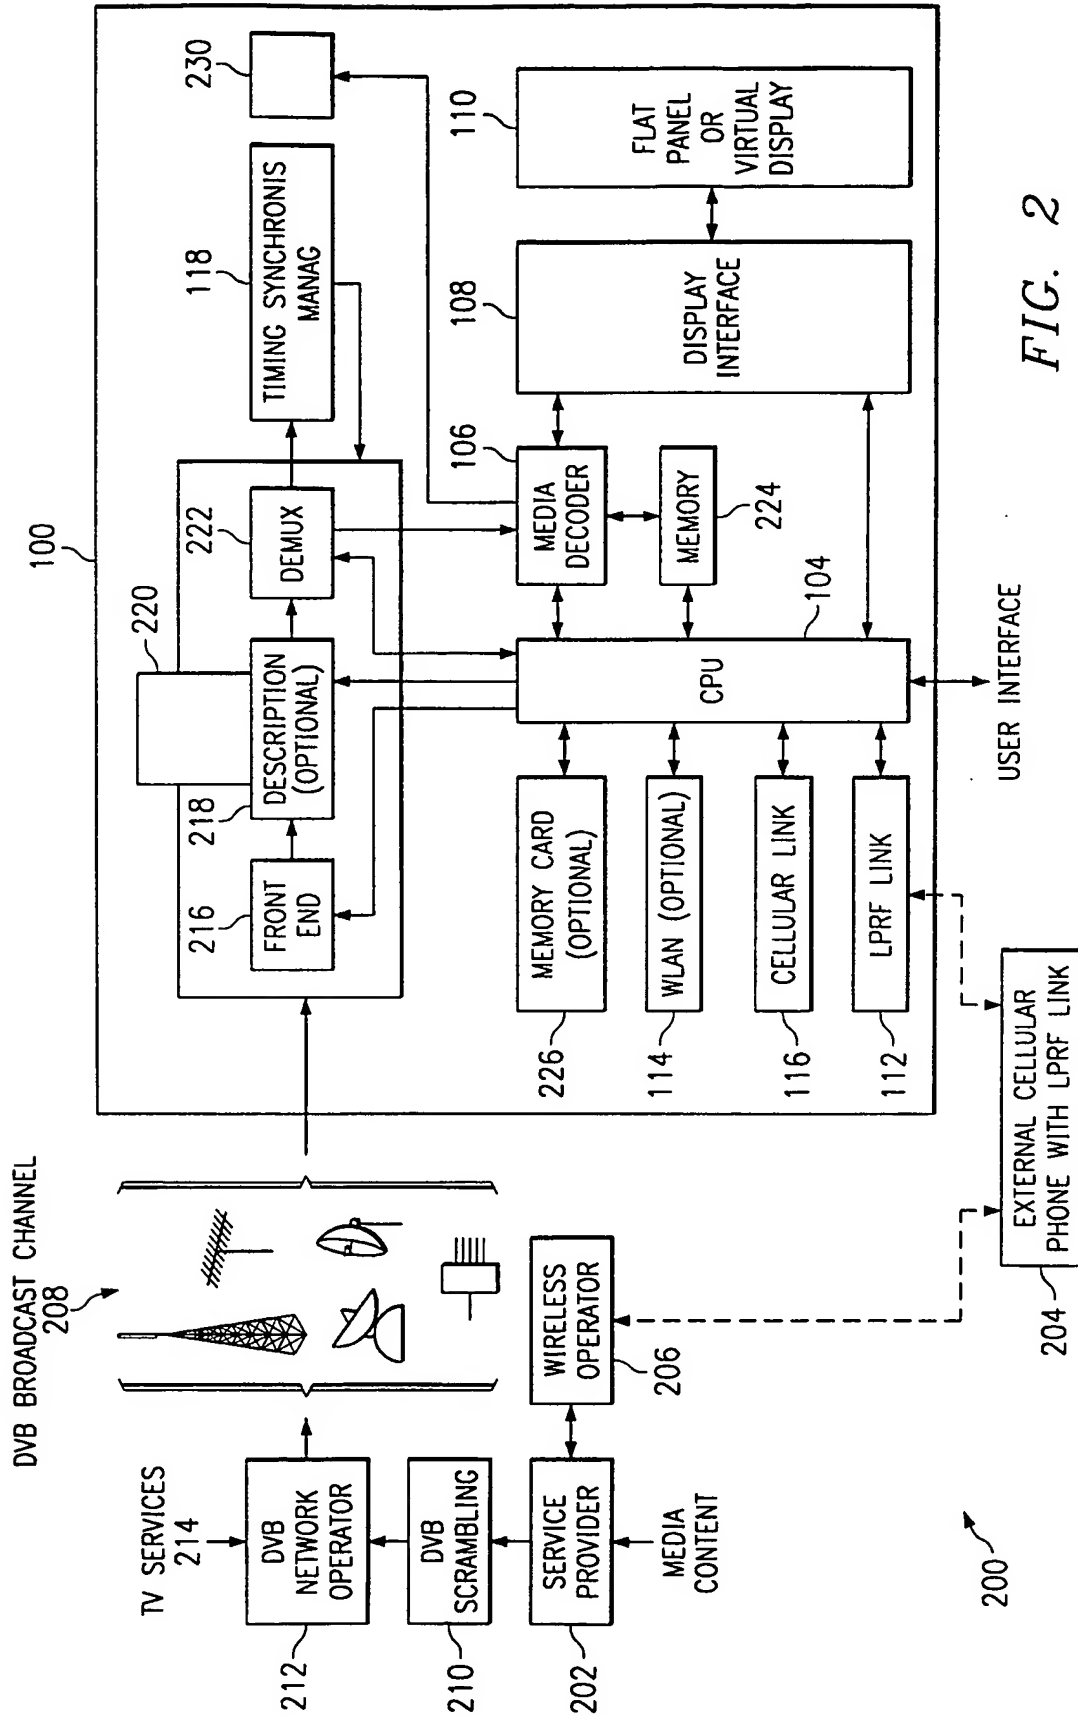


FIG. 3  
(PRIOR ART)

2/3



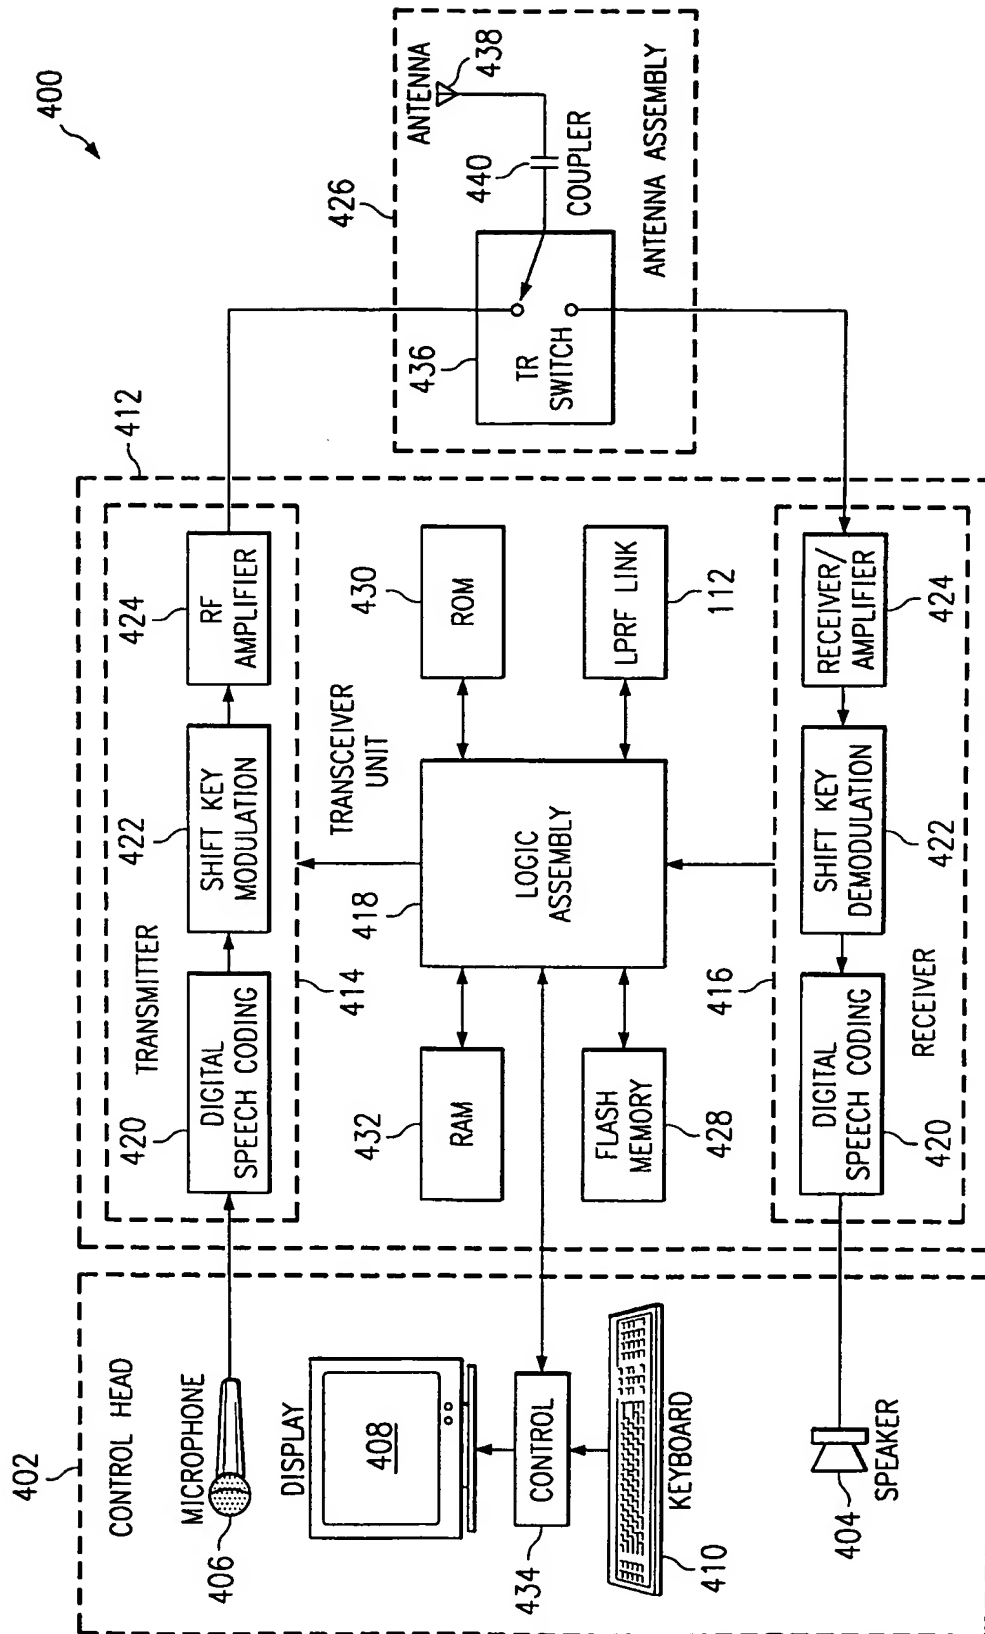


FIG. 4

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 00/01176

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04N7/173 H04N7/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 0 804 012 A (NOKIA) 29 October 1997 (1997-10-29) column 1, line 48 - line 52  column 2, line 22 - line 28 column 2, line 38 - line 42 column 3, line 6 - line 7 column 3, line 46 - line 54 column 4, line 39 - line 52 column 4, line 57 - column 5, line 3 column 5, line 9 - line 16 -----	1-4, 7  13, 27, 39, 41, 43
X A	EP 0 797 342 A (SONY) 24 September 1997 (1997-09-24) abstract page 5, line 8 - line 10 page 7, line 29 - line 32 page 10, line 5 - line 13 -----	1, 7, 8, 11, 12 13, 27
-/--		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

27 November 2000

Date of mailing of the international search report

01/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Dockhorn, H

# INTERNATIONAL SEARCH REPORT

Inter. Jnal Application No

PCT/IB 00/01176

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 99 34599 A (VSIS INC)  8 July 1999 (1999-07-08)  abstract</p> <p>-----</p>	1,13,27

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Appl. Application No

PCT/IB 00/01176

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 804012	A	29-10-1997	FI 961750 A JP 10098706 A	24-10-1997 14-04-1998
EP 797342	A	24-09-1997	CN 1172568 A WO 9714244 A	04-02-1998 17-04-1997
WO 9934599	A	08-07-1999	US 6097441 A AU 2010599 A EP 1044564 A	01-08-2000 19-07-1999 18-10-2000